



Overview

The HP ProLiant ML310 G5p is an affordable, single processor tower server engineered to meet the needs of corporate small sites. It is designed to provide the solid network foundation essential to fuel thriving small offices. Processing power ranging from single-core Celeron to quad-core Xeon combines with industry-leading management and essential data protection features for a secure, affordable platform that helps you run your business efficiently.

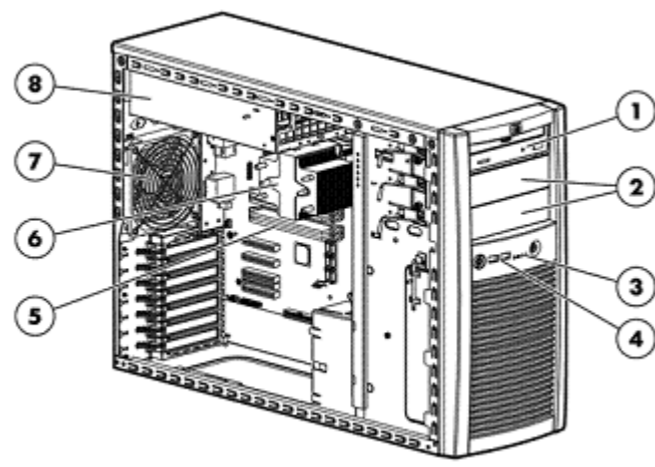

Front View:

1. SATA DVD-ROM
2. Removable Media Bays
3. LED Indicators and Power Button
4. Upfront USB Ports
5. Four DIMM Sockets for up to 8GB DDR2 memory
6. Processor Socket (Intel® Xeon®, Core™2, Pentium® or Celeron®)
7. System Fan
8. 410W Non-Hot Plug Non-Redundant Power Supply or 430W Hot Plug Redundant Power Supplies

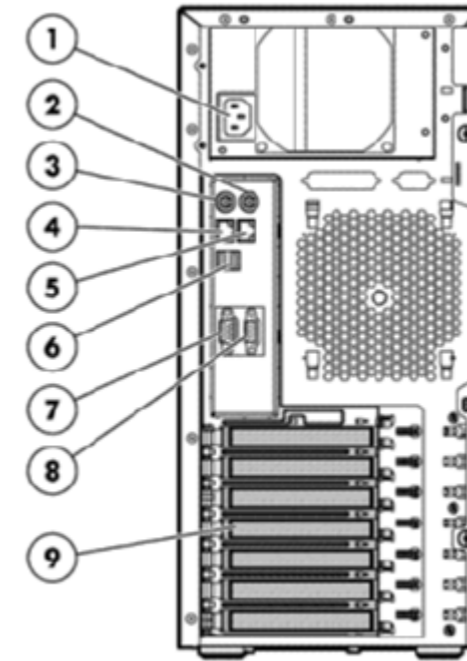

Rear View:

1. Power cord connections for Non-Redundant Power Supply
2. PS/2 Mouse connector
3. PS/2 Keyboard connector
4. 10/100/1000 NIC 1 Shared iLO 2
5. 10/100/1000 NIC 2
6. USB 2.0 (qty 2)
7. Video Port
8. Serial Port
9. Up to Five Expansion Slots (Four PCI Express and One PCI-X (Optional))

Standard Features

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

| | |
|---|---|
| Processor One of the following depending on Model | <p>Quad-Core Processors</p> <p>Intel® Core™2 Q9400 (2.66 GHz, 6MB L2 Cache, 95 Watts, 1333MHz FSB) Processor Intel® Xeon® X3330 (2.66GHz/4-core/12MB/95W) Processor</p> <p>Dual-Core Processors</p> <p>Intel® Xeon® E3120 (3.16GHz/2-core/6MB/65W) Processor Intel® Xeon® E3110 (3.0GHz/2-core/6MB/65W) Processor Intel® Xeon® E8400 (3.0GHz/2-core/6MB/65W) Processor Intel® Xeon® E6400 (2.13GHz/2-core/2MB/65W) Processor Intel® Pentium® 2160 (1.80GHz/2-core/1MB/65W) Processor</p> <p>Single-Core Processors</p> <p>Intel® Celeron 440 (2.0GHz/1-core/512KB/35W) Processor</p> |
|---|---|

| | |
|--|--|
| Cache Memory One of the following depending on Model | <p>6 MB L2 Cache NOTE: For Models with Intel Xeon processor X3330, and E3120. For Models with Intel Core 2 processor Q9400, E8400.</p> <p>2 MB L2 Cache NOTE: For Models with the Intel Core2 processor E6400.</p> <p>1 MB L2 Cache NOTE: For Models with the Intel Pentium processor E2160.</p> <p>512 KB L2 Cache NOTE: For Models with the Intel Celeron processor 440.</p> |
|--|--|

| | |
|----------------|---|
| Chipset | <p>Intel® 3210 Chipset</p> <p>NOTE: For more information regarding Intel® chipsets, please see the following URL: http://www.intel.com/products/server/chipsets/.</p> |
|----------------|---|

| | |
|--------------------------|-----|
| Memory Protection | ECC |
|--------------------------|-----|

| | | |
|--|----------|---------------------------------------|
| Memory One of the following depending on Model | Type | PC2-6400 (DDR2-800) Unbuffered Memory |
| | Standard | 1 GB (1 x 1 GB) |
| | Maximum | 8 GB |

| | |
|---------------------------|-------------------------------------|
| Network Controller | NC326i Dual Integrated Gigabit NICs |
|---------------------------|-------------------------------------|

| Expansion Slots NOTE: Up to 5 Total: (1) PCI Express x8, (3) PCI Express x1, Optional Extender Board for (1) 64-bit/100MHz PCI-X. | | | | | | | | |
|--|----------------------|--------------|-----------------|-------------|--------------|-------------------------------|-------|--|
| Expansion Slots # | Technology | Bus Width*** | Connector Width | Bus Number* | Device No.** | Form Factor | Notes | |
| 7 | PCIe | x1 | x8 | 4 | 0 | Half length, full height slot | | |
| 6 | PCIe | x1 | x8 | 7 | 0 | Half length, full height slot | | |
| 5 | PCIe | x1 | x8 | 10 | 0 | Full length, full height slot | | |
| 3 | PCIe | x8 | x8 | 18 | 0 | Full length, full height slot | | |
| 1 (Optional) | PCI-X (100MHz, 3.3V) | 64-bit | Not applicable | 14 | 2 | Full length, full height slot | | |
| * Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number | | | | | | | | |
| ** Slots are enumerated differently based on OS. MS OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus). | | | | | | | | |
| *** Indicates the number of physical electrical lanes running to a PCI-e connector. | | | | | | | | |

| | |
|----------------------------|---|
| Storage Controllers | <p>The HP ProLiant ML310 G5p supports Serial ATA (SATA) and Serial Attached SCSI (SAS) hard drives. Models described as SAS models include an 8 port HBA or controller that supports both SATA and SAS hard drives in non-RAID, RAID 0, or RAID 1 configurations. Models described as SATA/SAS support SATA hard drives standard and require the installation of an HBA or controller to support SAS.</p> <p>Embedded HP SC40Ge SAS HBA with RAID 0, 1</p> <p>NOTE: Use of the embedded SATA RAID feature with a Linux operating system requires installation of a driver from a floppy drive. The supported floppy drive can be a USB drive key (except Windows 2003), USB floppy drive, half-height internal floppy drive, or virtual floppy via Integrated Lights-Out 2 (iLO 2).</p> <p>NOTE: See the "Storage" section of these QuickSpecs for information on required to support SATA and SAS hard drive configurations.</p> |
|----------------------------|---|

| | |
|---------------------------------|---|
| Internal Storage Devices | <p>Diskette Drive</p> <p>Optional 1.44 MB Diskette Drive NOTE: Use of the embedded SATA RAID feature with a Linux operating system requires installation of a driver from a floppy drive. The supported floppy drive can be a USB drive key, USB floppy drive, half-height internal floppy drive, or virtual floppy via Integrated Lights-Out 2 (iLO 2).</p> <p>Optical Drive</p> <p>SATA DVD-ROM Drive Standard</p> <p>Hard Drives</p> <p>None Standard</p> |
|---------------------------------|---|

| | |
|---------------------------------|---|
| Maximum Internal Storage | <p>Hot Plug SAS (3.5")</p> <p>4.0TB</p> <p>4 x 1TB</p> <p>Hot Plug SATA (3.5")</p> <p>8.0TB</p> <p>4 x 2TB</p> <p>NOTE: See the "Storage" section of these QuickSpecs for information on controllers required to support SATA and SAS hard drive configurations.</p> |
|---------------------------------|---|

| | |
|-------------------|--|
| Interfaces | <p>Serial</p> <p>1 (Optional second serial port available)</p> <p>Parallel</p> <p>1 (Optional)</p> <p>Network RJ-45 (Ethernet)</p> <p>2 (1 Shared iLO 2 port)</p> <p>iLO 2 Remote Management port</p> <p>1 (see Network RJ-45 port)</p> <p>Keyboard</p> <p>1</p> <p>Pointing Device (Mouse)</p> <p>1</p> <p>Graphics</p> <p>1</p> <p>Dedicated USB Port</p> <p>1 (available for USB tape connectivity)</p> <p>USB Ports</p> <p>5 (2 front; 2 rear; 1 internal)</p> <p>NOTE: Please see the following URL for additional information regarding USB support: http://h18004.www1.hp.com/products/servers/platforms/usb-support.html.</p> |
|-------------------|--|

| | |
|-------------------------------------|---|
| Industry Standard Compliance | <p>ACPI V1.0b and 2.0 Compliant</p> <p>PCI 3.0 Compliant</p> <p>PCI-X 3.0 Compliant</p> <p>PCI-Express 3.0 Compliant</p> <p>PXE Support</p> <p>WOL Support</p> <p>Microsoft® Logo certifications</p> <p>Novell Logo certifications</p> <p>USB 2.0 Support</p> |
|-------------------------------------|---|

| | |
|---------------------------|--|
| Server Power Cords | <p>All models ship with one 1.8m (6 foot) standard low-line, country specific power cord. Localized cables included with geographic specific models in other world regions.</p> <p>NOTE: HP ProLiant ML310 a C13 to C14 2.8M jumper cord ships standard. If customers require a local power cord, they can check the power cord matrix for the appropriate country specific sku. Please see the following power cord matrix: http://www.hp.com/go/powercordmatrix.</p> |
|---------------------------|--|

| | |
|---------------------|--|
| Power Supply | <p>410 Watt PFC (Power Factor Correcting) non-hot plug non-redundant power supply or 430 Watt PFC hot plug redundant power supplies (ships with two power supplies)</p> <p>NOTE: To review typical system power ratings use the HP Power Advisor which is available online located at url: www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor</p> |
|---------------------|--|



Standard Features

| | | |
|---|---|---|
| System Fans | 1 - Non-hot plug, Non-redundant system fans; 1 optional fan for PCI-X Extender Board NOTE: Does not include fan in power supply. | |
| Required Cabling | For required cabling information, refer to the HP Web site at: www.hp.com/servers/ml310-g5p . | |
| Operating Systems and Virtualization Software Support for ProLiant Servers | <p>Microsoft Windows Server Microsoft Windows Server Hyper V Red Hat Enterprise Linux (RHEL) SUSE Linux Enterprise Server (SLES) Oracle Enterprise Linux (OEL)</p> <p>NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server including how to purchase from HP, please visit our OS Support Site at: http://www.hp.com/go/ossupport and our driver download page www.hp.com/support/ML310G5p.</p> | |
| Graphics | <p>Integrated ATI ES1000, 32 MB video standard</p> <ul style="list-style-type: none"> 16 bit color: maximum resolution of 1600 x 1200 32 bit color: maximum resolution of 1280 x 1024 <p>NOTE: Maximum resolution available via iLO 2 remote console is 1280 x 1024.</p> | |
| Form Factor | <p>Tower (5U) Optional Tower-to-Rack Enabling Kit available (system & tray occupy 6U)</p> | |
| HP Insight management software | <p>HP Foundation Pack</p> <p>HP Integrated Lights-Out (iLO)</p> | <p>Managing the growing number of servers can be complex and expensive for your organization. IT managers need to address changing business needs with tools that meet the challenges of managing today's complex Datacenters.</p> <p>HP provides management solutions that are designed to simplify a server's installation, configuration and maintenance throughout the entire server lifecycle. This provides the customer with higher levels of operational efficiency and highly reliable systems: www.hp.com/go/foundation.</p> <p>The foundation pack includes:</p> <ul style="list-style-type: none"> HP SmartStart HP Management DVD HP ProLiant Smart Update Firmware DVD <p>SmartStart version supported (minimum): SmartStart 7.51 http://www.hp.com/servers/smartstart</p> <p>NOTE: In an effort to support reducing our environmental impact, the HP Insight Foundation Suite for ProLiant media will be available as a selectable option for this server at time of order of a CTO SKU. This will allow customers to order the number of media kits that best meet their needs and eliminate receiving unnecessary duplicate media.</p> <p>HP Integrated Lights-Out (iLO) simplifies server setup, health monitoring, power and thermal control, and lights-out remote administration of ProLiant ML, DL, and BL servers. HP iLO functions without additional software and can be accessed from any location via a web browser. HP iLO works hand-in-hand with HP Systems Insight Manager, Insight Control, and Insight Dynamics for ProLiant, helping customers unleash the value of the ProLiant platform and deliver the highest possible quality of IT service. For more information, visit: www.hp.com/go/iLO</p> |
| Intelligent Manageability | <p>HP Systems Insight Manager Online ROM Flash Utility Drive Parameter Tracking (with Smart Array Controller) Dynamic Sector Repairing (with Smart Array Controller) Pre-Failure Warranty (covers processors, memory and SAS hard drives) BIOS Serial Console</p> | |
| Security | <p>Power-on password Setup password Diskette boot control Power switch security</p> | |
| Warranty | <p>This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners. Hardware diagnostic support and repair is available for one year, with 1 year Next Business Day and year on-site support from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Expanded support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details</p> <p>NOTE: Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html</p> | |

Optional Features

| | | |
|--|---|---|
| HP Insight management software | HP Insight Control | <p>HP Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console.</p> |
| | | <p>Two versions of Insight Control are available, to serve environments requiring either a Linux-based or a Windows-based central management server: HP Insight Control for Linux, and HP Insight Control. See www.hp.com/go/insightcontrol</p> |
| | HP Insight Dynamics for ProLiant | <p>HP Insight Control includes one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, please visit: http://www.hp.com/services/insight.</p> <p>HP Insight Dynamics for ProLiant, a product option, is an integrated command center that enables IT Staff personnel to continuously analyze and optimize a converged infrastructure, while automating and reducing the cost of common data center tasks by as much as 40 percent. As a powerfully integrated by design toolkit to accelerate complex technology projects and simplify daily operations that ultimately enable IT Staff personnel to dynamically keep pace with the organizations changing business requirements. It enables them to plan capacity and power continuously, balance across physical and virtual resources, and ensure cost-effective high availability. It also enables IT organizations to provision infrastructure consistently and automatically from pools of shared resources using a self-service portal. Resources provisioned can range from a single virtual machine to complex multi-tier environments and their associated physical and virtual resource requirements. In addition to the previous functional benefits, it also provides a cost-effective disaster recovery for physical and virtual environments that works with HP Continuous Access software for both the Enterprise Virtual Array and the XP storage array allowing application environments to be reactivated in minutes with the touch of a button to a remote location.</p> |
| | | <p>NOTE: For more information, visit: http://www.hp.com/go/insightdynamics</p> |
| Rack and Rack Options | Rack Cabinets: | |
| | | <ul style="list-style-type: none"> • For information regarding Rack Cabinets, please see the following URL: http://www.hp.com/go/rackandpower |
| | KVM Switches, Serial Console Servers, Rackmount Monitors, Keyboards: | |
| | | <ul style="list-style-type: none"> • For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: http://www.hp.com/go/kvm. |
| Factory Express Portfolio for Servers and Storage | <p>HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.</p> | |
| | <p>Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.</p> | |
| | | <p>For more information on Factory Express services for your specific server model please contact your sales representative or go to: http://www.hp.com/go/factory-express.</p> |
| HP Enterprise Configurator | <p>The HP eConfigure-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance. http://www.hp.com/products/configurator.</p> | |

Service and Support

Service and Support

HP Technology Services for Industry Standard Servers and BladeSystem

Capitalizing on HP ProLiant server and HP BladeSystem capabilities requires a service partner who understands your increasingly complex business technology environment. That's why it makes sense to team up with the people who know HP infrastructure hardware and software best - the experienced professionals at HP Services.

What HP ProLiant and BladeSystem Services can do for you

HP ProLiant and BladeSystem Services can help you design, deploy, test, integrate, support, and manage IT and infrastructure solutions. This way, HP proposes services solutions that include more than just uplift of base warranty. You can get the support you need by choosing from one of a number of service packaged solutions we have designed to address wider set of customer support needs.

HP Technology Services meets business challenges with services offered in three packages - **Optimized Care Package, Standard Care Package, and Basic Care Package** - available for each product group. Such packaged solutions enable customers to optimize technology operations, minimize risk and drive better business outcomes with easy-to-buy, easy-to-use scalable support packages for servers, storage, networking and software.

Optimized Care**Optimized Care Package: Supports maintaining servers at optimum performance availability****HP ProLiant Server Hardware Installation**

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner
<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>

HP Installation and Startup for Insight Control Software

Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML and DL series servers or HP BladeSystem servers
<http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA0-9972ENW.pdf>

3-Year HP Critical Advantage

Provides end-to-end infrastructure support solution for business critical applications running on virtualized/x86 infrastructures, enabling the customers to cost effectively build, operate, and continuously improve their IT environment

<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA3-1772ENW>

Additional Services: Microsoft or Linux or VMware education courses + Facility & technology environmental assessment services + Energy Efficiency Design, Factory Express

Standard Care**Standard Care Package: Package that maintains high level of server availability****HP ProLiant Server Hardware Installation**

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner
<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>

HP Installation and Startup for Insight Control Software

Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML and DL series servers or HP BladeSystem servers
<http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA0-9972ENW.pdf>

3-Year HP 6 hour Hardware Support Onsite Call-to-Repair Service

Provides an IT manager with a team of support specialists who will quickly begin troubleshooting the system to help return the hardware to operating condition within 6 hours of the initial service request to the HP Global Solution Center

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5982-6547EN.pdf>

3-Year , HP 24x7 Software Support for Insight Control

Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML and DL series servers or HP BladeSystem servers
<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6645EEE.pdf>

Additional Services: Software OS (Microsoft, Linux (SUSE/Red Hat) & VMware Installation & Start Up, and Software Support; Install and Startup Services for Insight Control; Microsoft or Linux or VMware education courses; +30 Proactive Select Credits, Factory Express

Basic Care**Basic Care Package: delivers minimum recommended support service level****HP ProLiant Server Hardware Installation**

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner
<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>

3-Year HP 24x7 4 hour Response, Hardware Support Onsite Service

Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML and DL series servers or HP BladeSystem servers
<http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA0-9972ENW.pdf>

Additional Services: Software OS (Microsoft, Linux (SUSE/Red Hat) & VMware Installation & Start Up and Software Support); +10 Proactive Select Credits, Factory Express

Insight Remote Support

The packages include HP Insight Remote Support that uses proven technology to deliver secure, reliable 24x7 remote monitoring, diagnoses, and problem resolution. It is available at no additional cost to all warranty, HP Care Pack Service, and service agreement customers.

For more information

To learn more on HP ProLiant servers and HP BladeSystem servers, please contact your HP sales representative or HP Authorized Channel Partner. Or visit: <http://www.hp.com/services/proliant>

Pre-configured Models

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

NOTE: Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.

NOTE: HP does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.

NOTE: If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

NOTE: Not all models are available in all regions. Check with your local country HP offices for availability.

| | | |
|---|---|---|
| <p>HP ProLiant ML310 G5p Q9400 1P 1GB-U Int SATA Hot Plug 4 LFF 430W RPS Server 515866-xx1</p> | <p>Processor(s) Cache Memory Memory Network Controller Storage Controller Hard Drives Internal Storage Optical Drive Power Supply Fans Form Factor Warranty</p> | <p>Intel® Core™2 processor Q9400 (2.66 GHz, 6MB L2 Cache, 95 Watts, 1333MHz FSB) 6MB L2 1GB (1x1GB) UDIMM Embedded NC326i Dual Integrated Gigabit NICs Embedded SATA with integrated SATA RAID 0, 1 None ship standard (Up to 4 hot plug SATA 3.5" drives supported standard. SAS 3.5" drives supported with optional HBA or controller) SAS: 4.0TB maximum; SATA: 8.0TB maximum SATA DVD-ROM Drive 430W redundant power supply 1 - Non-hot plug, Non-redundant system fans Tower (5U) (Optional Tower to Rack Enabling Kit available, system & tray occupy 6U) Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response.</p> |
|---|---|---|

| | | |
|--|---|---|
| <p>HP ProLiant ML310 G5p E8400 1P 1GB-U Int SATA Hot Plug 4 LFF 410W PS Server 515867-xx1</p> | <p>Processor(s) Cache Memory Memory Network Controller Storage Controller Hard Drives Internal Storage Optical Drive Power Supply Fans Form Factor Warranty</p> | <p>Intel® Xeon® E8400 (3.0GHz/2-core/6MB/65W) Processor 6MB L2 1GB (1x1GB) UDIMM Embedded NC326i Dual Integrated Gigabit NICs Embedded SATA with integrated SATA RAID 0, 1 None ship standard (Up to 4 hot plug SATA 3.5" drives supported standard. SAS 3.5" drives supported with optional HBA or controller) SAS: 4.0TB maximum; SATA: 8.0TB maximum SATA DVD-ROM Drive 410W non-hot plug non-redundant power supply 1 - Non-hot plug, Non-redundant system fans Tower (5U) (Optional Tower to Rack Enabling Kit available, system & tray occupy 6U) Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response.</p> |
|--|---|---|

| | | |
|-------------------------|--|---|
| Country Code Key | <p>xx=00 xx=01 xx=03 xx=04 xx=05 xx=29 xx=37 xx=42</p> | <p>US Australia UK Germany France Japan AP Europe</p> |
|-------------------------|--|---|

Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

NOTE: Configure-to-order (CTO) servers must start with a CTO Chassis.

NOTE: FIO indicates that this option is only available as a factory installable option.

Step 1: Base Configuration

| | | |
|------------------|---|------------|
| HP Models | HP ProLiant ML310 G5p Configure-to-order Tower Chassis Factory Integrated Models ship with: Embedded NC326i Gigabit Server Adapter Integrated Four Port SATA Controller (HP-SATA/SAS chassis only) Keyboard and Mouse NOTE: The ML310G5p CTO chassis offers pluggable SATA/SAS Drives. It is required to purchase a Smart Array controller if hot plug function is needed. | 445343-B22 |
|------------------|---|------------|

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

| | | |
|--------------------------|---|--|
| HP Processors | HP ML310 G5p Intel® Celeron 440 (2.0GHz/1-core/512KB/35W) FIO Processor Kit HP ML310 G5p Intel® Xeon® E3120 (3.16GHz/2-core/6MB/65W) FIO Processor Kit HP ML310 G5p Intel® Xeon® E8400 (3.0GHz/2-core/6MB/65W) FIO Processor Kit HP ML310 G5p Intel® Core2® Q9400 (2.66GHz/4-core/6MB/95W) FIO Processor Kit | 519647-L21 519651-L21 517494-L21 517495-L21 |
| HP Memory | HP 2GB (1x2GB) Dual Rank PC2-6400 (DDR2-800) Unbuffered Memory Kit HP 1GB (1x1GB) Dual Rank PC2-6400 (DDR2-800) Unbuffered Memory Kit | 450260-B21 450259-B21 |
| HP Power Supplies | NOTE: Prior to making a power supply selection it is highly recommended that the HP Power Advisor is run to determine the right size power supply for your server configuration. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor HP 430W Hot Plug Factory Integrated Power Supply Kit NOTE: Hot plug redundant power supply Kit ships with two power supplies. HP ML310G5 Factory Integrated Non-Hot Plug 410 Watts Power Supply NOTE: Non-hot plug power supply ships with one power supply. | 431652-B21 459902-B21 |

Step 3: Choose Additional Factory Integratable Options

| | | |
|----------------------------|--|--|
| HP Controllers | NOTE: When hot-plug SATA hard drives are installed, SATA LED functionality and full SATA hot-plug capability are not supported with the embedded controller. For full LED and hot-plug support, an optional SATA/SAS RAID controller must be installed. SAS Controllers support both SAS and SATA hard drives. Some SAS Controllers also have SAS tape support. Please refer to the "Tape and Disk-Based Backup" table in the Storage section for a list of SAS Controllers with tape support. HP Smart Array E200/128 BBWC 2-ports Int PCIe x4 SAS Controller NOTE: RAID 0, 1, 1+0, 5. HP Smart Array P400/256 2-ports Int PCIe x8 SAS Controller NOTE: RAID 0, 1, 1+0, 5. HP Smart Array P400 512MB Battery Kit NOTE: RAID 0, 1, 1+0, 5, 6. HP Smart Array P800/512 BBWC 2-ports Int/2-ports Ext PCIe x8 SAS Controller NOTE: RAID 0, 1, 1+0, 5, 6. HP Smart Array P212/256 1-ports Int/1-ports Ext PCIe x8 SAS Controller NOTE: RAID 0, 1, 1+0, 5, 5+0. HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller NOTE: RAID 0, 1, 1+0. HP Smart Array P411/256 BBWC 2-ports Ext PCIe x8 FIO SAS Controller NOTE: RAID 0, 1, 1+0, 5, 5+0. HP Smart Array P411/256 2-ports Ext PCIe x8 SAS Controller NOTE: RAID 0, 1, 1+0, 5, 5+0. HP Smart Array P411/512 BBWC 2-ports Ext PCIe x8 SAS Controller NOTE: RAID 0, 1, 1+0, 5, 5+0. HP Smart Array P410/256 BBWC 2-ports Int PCIe x8 FIO SAS Controller NOTE: RAID 0, 1, 1+0, 5, 5+0. HP Smart Array P410/256 2-ports Int PCIe x8 SAS Controller NOTE: RAID 0, 1, 1+0, 5, 5+0. HP Smart Array P410/512 BBWC 2-ports Int PCIe x8 SAS Controller NOTE: RAID 0, 1, 1+0, 5, 5+0. HP Smart Array P410/ZM 2-ports Int PCIe x8 FIO SAS Controller NOTE: RAID 0, 1, 1+0. HP Mini SAS to 8484 18in/24in Cable Assembly NOTE: This part number must be used with Smart Array P212/P411 Controller for SAS models. SAS HBA HP Modular Smart Array SC44Ge 1-ports Int/1-ports Ext PCIe x8 SAS Host Bus Adapter NOTE: RAID 0, 1. NOTE: When using the SC44Ge with SATA Hard Drives, 1.5G SATA Hard Drives are required. Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS. HP 64/133 2-ports Int PCI-X SAS Host Bus Adapter NOTE: When using the 8 Internal Port SAS HBA with SATA Hard Drives, 1.5G SATA Hard Drives are required. NOTE: Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS. | 411508-B21 405132-B21 411064-B21 381513-B21 462834-B21 462828-B21 491193-B21 462830-B21 462832-B21 491195-B21 462862-B21 462864-B21 462860-B21 496015-B21 416096-B21 347786-B21 |
| HP Insight Software | HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO License | 582765-B21 |

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" section below.

Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

| | | |
|---|---|------------|
| HP Memory | HP 2GB (1x2GB) Dual Rank PC2-6400 (DDR2-800) Unbuffered Memory Kit | 450260-B21 |
| | HP 1GB (1x1GB) Dual Rank PC2-6400 (DDR2-800) Unbuffered Memory Kit | 450259-B21 |
| HP Floppy Drives | HP ML110G2/ML310G2/G3 Floppy Drive Kit | 379257-B21 |
| HP Optical Drives | HP Half-Height SATA DVD-ROM Optical Drive | 447326-B21 |
| | HP Half-Height SATA DVD-RW Optical Drive | 447328-B21 |
| HP Hard Drives | <p>NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.</p> <p>NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.</p> <p>NOTE: A HP Smart Array Controller is required for hot plug functionality.</p> <p>SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives</p> <p>HP 600GB 6G SAS 15K rpm LFF (3.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive 516828-B21</p> <p>HP 450GB 6G SAS 15K rpm LFF (3.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive 516816-B21</p> <p>HP 300GB 6G SAS 15K rpm LFF (3.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive 516814-B21</p> <p>SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives</p> <p>HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) Dual Port Midline 1yr Warranty Hard Drive 507614-B21</p> <p>NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.html (Worldwide)</p> <p>SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives</p> <p>HP 2TB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive 507632-B21</p> <p>HP 1TB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive 454146-B21</p> <p>HP 500GB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive 458928-B21</p> <p>SATA Hot Plug LFF (3.5-inch) Entry (ETY) Drives</p> <p>HP 250GB 3G SATA 7.2K rpm LFF (3.5-inch) Entry 1yr Warranty Hard Drive 571230-B21</p> <p>HP 160GB 3G SATA 7.2K rpm LFF (3.5-inch) Entry 1yr Warranty Hard Drive 458945-B21</p> <p>NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13021_div/13021_div.html (Worldwide)</p> | |
| HP Networking | Gigabit Ethernet Adapters | |
| | HP NC365T 4-port Ethernet Server Adapter | 593722-B21 |
| | HP NC375T PCI Express Quad Port Gigabit Server Adapter | 538696-B21 |
| HP I/O Expansion Options | HP Parallel/Serial Port ML370/350 G5 Kit | 401222-B21 |
| NOTE: Please see the QuickSpecs for Technical Specifications and additional information: www.hp.com/go/ProLiantNICs | | |

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

HP Insight Software

HP Insight Control

HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License
 HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Electronic License
 HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License
 HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Tracking License
 HP Insight Software Media Kit

T9074BAE
 TC278AAE
 452148-B22
 TC275A
 436222-B21

NOTE: Insight Software DVD media without licenses. Contains HP Systems Insight Manager, HP Insight Control, HP Insight Dynamics, HP Insight Control for Microsoft System Center, and Virtual Connect Enterprise Manager software. Uses an integrated installer to perform quick and accurate software installation and updates.

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

NOTE: Electronic software is available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent.

NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

NOTE: Licenses ship without media. The HP Insight Control Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/insightupdates>.

NOTE: For additional license options please see the Insight Control QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12631_div/12631_div.html

HP Insight Control for Linux

HP Insight Control for Linux including 1yr 24x7 Support Electronic License
 HP Insight Control for Linux including 1yr 24x7 Support Single Server License
 HP Insight Control for Linux Media Kit

TC213AAE
 TC209A
 TC208A

NOTE: Media pack DVD contains the ISO image for HP Insight Control for Linux, HP Systems Insight Manager, HP Insight Control power management, HP Insight Control virtual machine management, and an integrated installer. Servers must be acquired separately.

NOTE: Licenses ship without media. The Media Kit for Insight Control for Linux can be ordered separately, or can be downloaded at: <http://www.hp.com/go/ic-linux> (click on Download button).

NOTE: Electronic software is available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent.

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single set of activation keys.

NOTE: For additional License Kits, including electronic licensing options, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/13019_div/13019_div.html

HP Integrated Lights-Out (iLO) Advanced

HP iLO Advanced including 1yr 24x7 Technical Support and Updates Electronic License
 HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License

TA850AAE
 512485-B21

NOTE: This license allows 1 server to be deployed and managed via HP iLO Advanced. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service

NOTE: Electronic software is available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent.

NOTE: For additional license kits, including electronic delivery options, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12362_div/12362_div.html

HP Security - TPM

HP Trusted Platform Module Option

488069-B21

NOTE: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline. For more information about TPM, including a white paper, go to: www.hp.com/go/TPM.

NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment.

NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.

HP Storage Controllers

SAS Cable

NOTE: A SAS HBA or Controller is required if SAS hard drives are selected. SAS HBAs support both SAS and SATA hard drives. Some SAS HBAs also have SAS tape support. Please refer to the "Tape and Disk-Based Backup" table in the Storage section for a list of SAS HBAs with tape support.

SAS Controllers

NOTE: Any Smart Array Controller or SAS HBA requires the purchase of the HP SAS Cable (p/n 460310-B21) for the ML310 G5p. Smart Array P212/P410/P411 Controller for SAS models require the purchase of the HP mini SAS Cable (p/n 496015-B21) for the ML310 G5p.

Smart Array E200 Controller

HP Smart Array E200/128 BBWC 2-ports Int PCIe x4 SAS Controller

411508-B21

Smart Array P400 Controller

HP Smart Array P400/256 2-ports Int PCIe x8 SAS Controller

405132-B21

HP Smart Array P400 512MB Battery Kit

411064-B21

Smart Array P800 Controller

HP Smart Array P800/512 BBWC 2-ports Int/2-ports Ext PCIe x8 SAS Controller

381513-B21

Smart Array P212 Controller

HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller

462828-B21

HP Smart Array P212/256 1-ports Int/1-ports Ext PCIe x8 SAS Controller

462834-B21

Smart Array P410 Controller

HP Smart Array P410/256 2-ports Int PCIe x8 SAS Controller

462862-B21

HP Smart Array P410/512 BBWC 2-ports Int PCIe x8 SAS Controller

462864-B21

HP Smart Array P410/512 FBWC 2-ports Int PCIe x8 SAS Controller

578230-B21

HP Smart Array P410/1G FBWC 2-ports Int PCIe x8 SAS Controller

572532-B21

Smart Array P411 Controller

HP Smart Array P411/256 2-ports Ext PCIe x8 SAS Controller

462830-B21

HP Smart Array P411/512 BBWC 2-ports Ext PCIe x8 SAS Controller

462832-B21

HP Smart Array P411/512 FBWC 2-ports Ext PCIe x8 SAS Controller

578229-B21

HP Smart Array P411/1G FBWC 2-ports Ext PCIe x8 SAS Controller

572531-B21

Smart Array P812 Controller

HP Smart Array P812/1G FBWC 2-ports Int/4-ports Ext PCIe x8 SAS Controller

487204-B21

Optional Upgrades

HP Smart Array P400 Battery Attach Kit

417836-B21

NOTE: This option kit contains a 24" battery cable and adhesive material for installing a batter into the server if a Smart Array E500 is integrated outside of the factory. For all solutions, please refer to the server QuickSpecs and User's Manual for detailed installation instructions.

HP Smart Array Cache Battery Kit

383280-B21

NOTE: For Smart Array P400 Controller only.

HP 512MB w/Battery Smart Array Battery Back Write Cache Enabler

405148-B21

NOTE: For Smart Array P400 Controller only.

HP 256MB P-series Cache Upgrade

462968-B21

NOTE: Supported on HP Smart Array P212 Controller only.

HP 512MB P-Series Battery Backed Write Cache Upgrade

462967-B21

NOTE: Supported on HP Smart Array P410 Controller and HP Smart Array P411 Controller only.

HP 512MB Flash Backed Write Cache

534916-B21

HP 1GB Flash Backed Cache

534562-B21

HP Mini SAS to 8484 18in/24in Cable Assembly

496015-B21

NOTE: This part number must be used with Smart Array P212/P411 Controller for SAS models.

HP Smart Array Advanced Pack including 1yr 24x7 Technical Support and Updates Single Server License

516471-B21

NOTE: This part number can be used to purchase a single license or to order multiple licenses with a single activation key. Customers will receive a license entitlement certificate via e-mail. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Include one year of 24x7 HP Software Technical Support Services.

NOTE: Please see the following QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/12460_div/12460_div.html

(Smart Array E200 Controller)

http://h18000.www1.hp.com/products/quickspecs/12400_div/12400_div.html

(Smart Array P400 Controller)

http://h18000.www1.hp.com/products/quickspecs/12616_div/12616_div.html

(Smart Array P800 Controller)

http://h18000.www1.hp.com/products/quickspecs/13203_div/13203_div.html

(Smart Array P212 Controller)

http://h18000.www1.hp.com/products/quickspecs/13201_div/13201_div.html

(Smart Array P410 Controller)

http://h18000.www1.hp.com/products/quickspecs/13202_div/13202_div.html

(Smart Array P411 Controller)

Additional Options

http://h18000.www1.hp.com/products/quickspecs/13558_div/13558_div.html
(Smart Array P812 Controller)
http://h18000.www1.hp.com/products/quickspecs/13200_div/13200_div.html
(Smart Array Advanced Pack)

SAS HBA

HP Modular Smart Array SC44Ge 1-ports Int/1-ports Ext PCIe x8 SAS Host Bus Adapter 416096-B21
NOTE: When using the SC44Ge with SATA Hard Drives, 1.5G SATA Hard Drives are required. Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS.

HP 64/133 2-ports Int PCI-X SAS Host Bus Adapter 347786-B21
NOTE: When using the 8 Internal Port SAS HBA with SATA Hard Drives, 1.5G SATA Hard Drives are required.
NOTE: Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS.

NOTE: Please see the HBA QuickSpecs for additional information:
http://h18004.www1.hp.com/products/quickspecs/12617_div/12617_div.html
(SC44Ge HBA)
http://h18004.www1.hp.com/products/quickspecs/12332_div/12332_div.html
(8 Internal Port SAS HBA)

SCSI HBA

HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter 412911-B21
NOTE: Recommended HBA for SCSI tape drive connect.
NOTE: If a Non-Hot Plug SCSI Tape Drive is selected in any model, then customer must add 412911-B21.

NOTE: Please see the following QuickSpecs for additional information:
http://h18004.www1.hp.com/products/quickspecs/11943_div/11943_div.html
(SCSI HBA)
http://h18000.www1.hp.com/products/quickspecs/12566_div/12566_div.html
(SC11Xe HBA)

HP Tape Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media see: <http://www.hp.com/go/tape>. For hardware and software compatibility of HP tape backup products see: <http://www.hp.com/storage/SPOCK>.

Rack-Mount Tape Solutions

- HP 1/8 G2 LTO-4 Ultrium 1760 SAS Tape Autoloader AK377A
NOTE: Requires HP 1U Tape Autoloader Rack Kit (AH166A) for rack installation.
- HP DAT 160 USB Internal Tape Drive Q1580A
- HP DAT 320 USB External Tape Drive AJ823A
- HP DAT 320 USB Internal Tape Drive AJ825A
- HP DAT 320 SAS External Tape Drive AJ828A
- HP DAT 320 SAS Internal Tape Drive AJ830A
- NOTE:** Connection using HP SC44Ge SAS Host Bus Adapter (416096-B21) recommended.
- HP Ultrium 448 SAS Internal Drive DW085A
NOTE: Connection using HP P212 Smart Array Controller SAS (462828-B21) recommended.
- HP 1/8 G2 Ultrium 920 SAS Autoloader AH558A
NOTE: Requires HP 1U Tape Autoloader Rack-Mount Kit (AH166A) for rack installation. Connection using HP P212 Smart Array Controller SAS (462828-B21) recommended.
- HP LTO-4 Ultrium 1760 SAS Internal WW Tape Drive EH919A
NOTE: Connection using HP SC44Ge SAS Host Bus Adapter (416096-B21) recommended.
- HP LTO-5 Ultrium 3000 SAS Internal Tape Drive EH957A
NOTE: Connection using HP SC44Ge SAS Host Bus Adapter (416096-B21) recommended.
- HP MSL2024 0-Drive Tape Library AK379A
- HP MSL2024 1 LTO-4 Ultrium 1760 SAS Tape Library AK378A
- HP MSL2024 Ultrium 920 SAS Tape Library AH559A
- HP MSL4048 2 LTO-4 Ultrium 1760 SAS Tape Library AK380A
- HP MSL4048 0-Drive Tape Library AK381A
- HP StorageWorks MSL4048 Ultrium 920 SAS Tape Library AH560A
- HP MSL8048 0-drive Tape Library AU300A
- HP 1/8 G2 Tape Autoloader Rack Kit AH166A
NOTE: Required to install the unit in a standard 19-inch rack; includes rails and rackmount instructions.

HP Disk Backup

NOTE: For the complete range of D2D Backup Systems see: <http://www.hp.com/go/d2d>. For the complete range of RDX drives and media see: <http://www.hp.com/go/rdx>. For hardware and software compatibility of HP disk backup products see: <http://www.hp.com/storage/SPOCK>.

HP RDX Removable Disk Backup Systems USB

- HP StorageWorks RDX320 Internal Removable Disk Backup System AJ767A
NOTE: For installation into 1U USB Rack-Mount Kit (A8007A). No peripheral bay available for drive installation into the server. 320GB of disk capacity per data cartridge.
- HP StorageWorks RDX1000 Internal Removable Disk Backup System BV847A

HP Storage Options

Storage SCSI HBA

HP U320e SCSI Dual Channel Host Bus Adapter AH627A
NOTE: Recommended HBA for MSL SCSI Tape Library connect.

HP Disk Storage Systems

MSA SAN Storage Arrays

HP MSA70 Array 418800-B21
NOTE: Supports 25 SFF drives, and SAS 3 Gb/s and SATA 1.5 Gb/s.
NOTE: Please see the QuickSpecs for additional options and configuration information at:
http://h18000.www1.hp.com/products/quickspecs/12652_div/12652_div.html

HP Disk Storage Systems

HP D2600 Disk Enclosure AJ940A
NOTE: Please see the QuickSpecs for additional options and configuration information at:
http://h18000.www1.hp.com/products/quickspecs/13404_div/13404_div.html
(Worldwide)

Additional Options

| | | |
|---|--|--|
| HP Uninterruptible Power Systems | <p>HP Tower UPS</p> <p>HP T750 G2 UPS</p> <p>HP T750 G2 750VA NA Tower Uninterruptible Power System AF446A</p> <p>HP T750 G2 750VA INTL Tower Uninterruptible Power System AF447A</p> <p>HP T1000 G3 UPS Models</p> <p>HP T1000 G3 1000VA NA Tower Uninterruptible Power System AF448A</p> <p>HP T1000 G3 1000VA INTL Tower Uninterruptible Power System AF449A</p> <p>HP T1500 G3 UPS Models</p> <p>HP T1500 G3 1400VA NA Tower Uninterruptible Power System AF450A</p> <p>HP T1500 G3 1400VA INTL Tower Uninterruptible Power System AF451A</p> <p>NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/13160_div/13160_div.html (Worldwide)</p> <p>HP R/T3000 G2 Uninterruptible Power System (UPS)</p> <p>HP R/T3000 G2 2U L530 Low Voltage NA/JP Uninterruptible Power System AF466A</p> <p>HP R/T3000 G2 2U L620 High Voltage NA/JP Uninterruptible Power System AF467A</p> <p>HP R/T3000 G2 2U Detachable Cord High Voltage INTL Uninterruptible Power System AF468A</p> <p>NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/14058_div/14058_div.html (Worldwide)</p> <p>HP R1500 G3 Uninterruptible Power Supply (UPS)</p> <p>HP R1.5kVA G3 1U NA Uninterruptible Power System AF469A</p> <p>HP R1.5kVA G3 1U JP/TW Uninterruptible Power System AF470A</p> <p>HP R1.5kVA G3 1U INTL Uninterruptible Power System AF471A</p> <p>NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/14059_div/14059_div.html (Worldwide)</p> <p>R5000 Uninterruptible Power System (UPS)</p> <p>HP R5KVA 3U IEC309-32A High Voltage INTL Uninterruptible Power System AF461A</p> <p>HP R5KVA 3U L630 High Voltage NA/JP Uninterruptible Power System AF460A</p> <p>NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/14109_div/14109_div.html (Worldwide)</p> <p>R7000 Uninterruptible Power System (UPS)</p> <p>HP R7KVA 4U 50A High Voltage NA/JP Uninterruptible Power System AF462A</p> <p>HP R7KVA 4U IEC-32A High Voltage INTL Uninterruptible Power System AF463A</p> <p>NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/14110_div/14110_div.html (Worldwide)</p> <p>NOTE: For additional information on HP Uninterruptible Power Systems please go to: www.hp.com/servers/rackups.</p> <p>NOTE: For additional information on sizing your server, please reference: http://www.upssizer.com.</p> <p>NOTE: Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: www.hp.com/products/powercords.</p> | |
| HP Rack Options | <p>Rack Kits</p> <p>HP Tower to Rack Conversion Tray Universal Kit 417705-B21</p> <p>NOTE: This is a Rack Enabling Kit that supports the HP ProLiant ML110 and HP ProLiant ML310 servers (system & tray occupy 6U).</p> <p>NOTE: Support for racks with round or square mounting holes (including all Compaq and HP Rack System /E and HP Systems), with an adjustment range of 24" - 36".</p> | |
| HP USB and SD Options | <p>HP 2GB USB Flash Media Drive Key Kit 608447-B21</p> <p>NOTE: HP qualified blank USB key for use with HP ProLiant servers that support the VMware virtualization environment and other HP value-add software like SmartStart. HP recommends this industry standard USB flash device for use with VMware ESXi. USB device must be installed in the internal slot of the ProLiant server for use with VMware ESXi. Refer to HP VMware Getting Started Guide for installation instructions.</p> | |
| HP Care Pack Services | <p>Hardware Services On-site Service</p> <p>HP 3 year Next business day ProLiant ML310 Hardware Support U4445E</p> <p>HP 3 year 4 hour 13x5 ProLiant ML310 Hardware Support U4446E</p> <p>HP 3 year 4 hour 24x7 ProLiant ML310 Hardware Support U4447E</p> <p>HP 3 year 6 hour 24x7 Call to Repair ProLiant ML310 Hardware Support U4448E</p> <p>Installation & Start-up Services</p> <p>HP Install ProLiant ML310 Service U4456E</p> <p>HP Startup ProLiant ML310 Service U4457E</p> <p>Support Plus</p> <p>HP 3 year Support Plus Microsoft ProLiant ML310 Service U4458E</p> <p>Support Plus 24</p> <p>HP 3 year Support Plus 24 Microsoft ProLiant ML310 Service U4459E</p> <p>HP 3 year Support Plus 24 SuSE ProLiant ML310 Service U6306E</p> <p>NOTE: For more information, customer/resellers can contact: http://www.hp.com/services/carepack.</p> | |

Memory

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

HP ProLiant ML310 G5p Memory Configuration

Standard Memory

All HP ProLiant ML310 G5p models ship with unbuffered, ECC PC2-6400 DDR2 SDRAM running at 800MHz.

All models include a single 1GB DIMM.

Factory Integrated Models include the memory capacity of your choice.

Standard Memory Replaced with Optional Memory

Up to 8 GB memory is available with the optional installation of four 2 GB PC2-6400 Unbuffered ECC DDR2 SDRAM DIMM kits.

DIMM upgrades do not need to be installed in pairs although installation of pairs (an equal size DIMM for each channel) provides the best performance. The BIOS will detect the DIMM population and initialize the system accordingly as follows:


- Single-channel mode - DIMMs installed for one channel only
- Dual-channel asymmetric mode - DIMMs installed for both channels but of unequal channel capacities.
- Dual-channel interleaved mode (recommended) - DIMMs installed for both channels and offering equal channel capacities, providing the highest performance.

The first DIMM should be installed in Socket 1. A DIMM should not be installed in Socket 2 without a DIMM in Socket 1. Likewise a DIMM should not be installed in Socket 4 without a DIMM in Socket 3. A DIMM need not be installed in Socket 2 in order to install a DIMM in Socket 3.

Table 3-1 shows some of the suggested memory configurations for these systems.

NOTE: Table 3-1 does not list all possible configurations. Balanced-capacity, dual-channel loading yields best performance.


| Channel A | | Channel B | | Total | Mode |
|-----------|----------|-----------|----------|--------|----------------------------|
| Socket 1 | Socket 2 | Socket 3 | Socket 4 | | |
| 512 MB | none | none | none | 512 MB | Single-channel |
| 512 MB | none | 512 MB | none | 1 GB | Single-channel interleaved |
| 1 GB | none | none | none | 1 GB | Single-channel |
| 1 GB | none | 1 GB | none | 2 GB | Single-channel interleaved |
| 1 GB | 1 GB | 1 GB | none | 3 GB | Dual-channel asymmetric |
| 1 GB | 1 GB | 1 GB | 1 GB | 4 GB | Dual-channel interleaved |
| 1 GB | 2 GB | 1 GB | 2 GB | 6 GB | Dual-channel interleaved |
| 2 GB | 2 GB | 2 GB | 2 GB | 8 GB | Dual-channel interleaved |

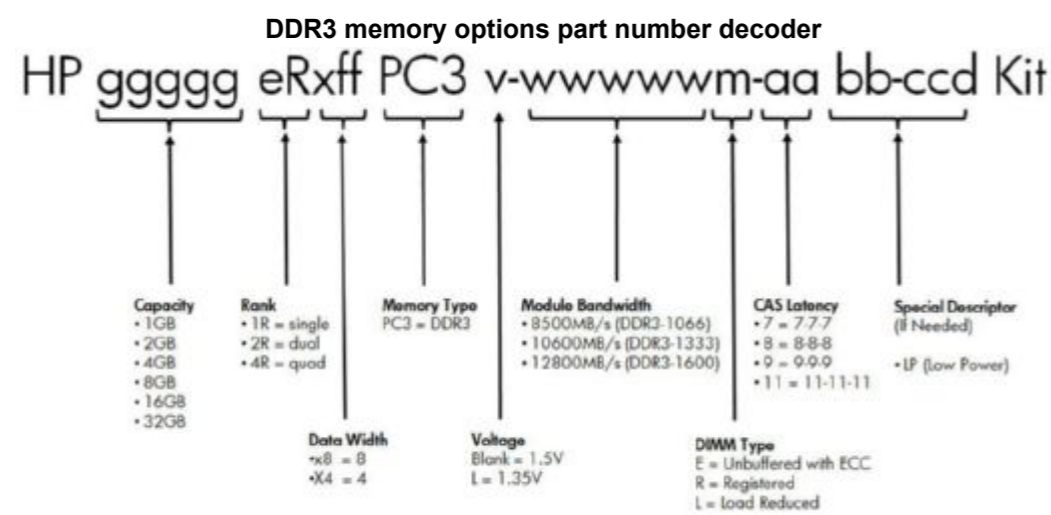

Following are memory options available from HP:

| | | |
|------------------|--|------------|
| HP Memory | HP 2GB (1x2GB) Dual Rank PC2-6400 (DDR2-800) Unbuffered Memory Kit | 450260-B21 |
| | HP 1GB (1x1GB) Dual Rank PC2-6400 (DDR2-800) Unbuffered Memory Kit | 450259-B21 |

Storage

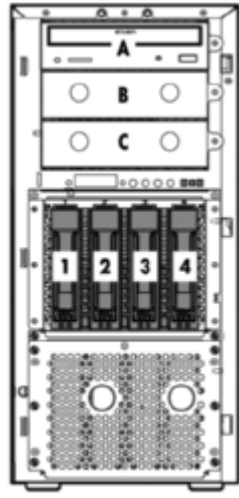

B, C Removable Media Bays (1.6" each)

A SATA DVD-ROM

1 - 4 Four Hot Plug Hard Drive Bays

Drive Support

| | Quantity Supported | Position Supported | Controller |
|---|--------------------|--------------------|-----------------|
| Removable Media | | | |
| 1.44-MB Diskette Drive | Up to 1 | A, B, or C | Integrated |
| HP Half-Height SATA DVD-ROM Optical Drive | Up to 2 | A, B, or C | Integrated SATA |
| HP Half-Height SATA DVD RW Optical Drive | Up to 2 | A, B, or C | Integrated SATA |

Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

| | Quantity Supported | Position Supported | Controller |
|------------------|--------------------|--------------------|---|
| 600GB 6G SAS 15K | Up to 4 | 1-4 | HP SC40Ge SAS HBA with RAID 0, 1 |
| 450GB 6G SAS 15K | | | NOTE: When using the SC40Ge with SATA Hard Drives, 1.5G SATA Hard Drives are required. Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS. |
| 300GB 6G SAS 15K | | | HP 8 Internal Port SAS HBA with RAID |
| | | | NOTE: Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS. |
| | | | HP Smart Array P212 0 MB Controller |
| | | | HP Smart Array E200/128 BBWC Controller |
| | | | HP Smart Array P212/256 MB Controller |
| | | | HP Smart Array P400/256 MB Controller |
| | | | HP Smart Array P410/256 MB Controller |
| | | | HP Smart Array P400/512 MB BBWC Controller |
| | | | HP Smart Array P800/512 BBWC Controller |

NOTE: Use of SAS hard drives in SATA/SAS models requires installation of one of the controllers or HBAs listed above.

SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives

| | Quantity Supported | Position Supported | Controller |
|-----------------|--------------------|--------------------|---|
| 1TB 6G SAS 7.2K | Up to 4 | 1-4 | HP SC40Ge SAS HBA with RAID |
| | | | NOTE: When using the SC40Ge with SATA Hard Drives, 1.5G SATA Hard Drives are required. Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS. |
| | | | HP 8 Internal Port SAS HBA with RAID |
| | | | NOTE: Transfer rate: 1.5 Gb/s SATA, 3 Gb/s SAS. |
| | | | HP Smart Array E200/128 BBWC Controller |
| | | | HP Smart Array P400/256 MB Controller |
| | | | HP Smart Array P400/512 MB BBWC Controller |
| | | | HP Smart Array P800/512 BBWC Controller |
| | | | HP Smart Array P212/Zero Memory Controller |
| | | | HP Smart Array P212/256 MB Controller |
| | | | HP Smart Array P410/256 MB Controller |
| | | | HP Smart Array P410/512 MB BBWC Controller |

NOTE: Use of SAS hard drives in SATA/SAS models requires installation of one of the controllers or HBAs listed above.

SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives

| | Quantity Supported | Position Supported | Controller |
|--------------------|----------------------------------|----------------------------------|--|
| 2TB 3G SATA 7.2K | Up to 2 | 1-2 | HP Smart Array E200/128 BBWC Controller |
| 1TB 3G SATA 7.2K | Up to 4 | 1-4 | HP Smart Array P400/256MB Controller |
| 500GB 3G SATA 7.2K | | | HP Smart Array P400/512MB BBWC Controller |
| | NOTE: depending on model. | NOTE: depending on model. | HP Smart Array P800/512MB BBWC Controller |
| | | | HP Smart Array P212/Zero Memory Controller |
| | | | HP Smart Array P212/256 MB Controller |
| | | | HP Smart Array P410/256 MB Controller |
| | | | HP Smart Array P410/512 MB BBWC Controller |

NOTE: Hot plug capability and drive LED status support requires installation of one of the controllers or HBAs listed above.

SATA Hot Plug 3.5" Midline (MDL) Solid State Drives

| | Quantity Supported | Position Supported | Controller |
|---------------------|--------------------|--------------------|--|
| 60GB 3.0G SATA SSD | Up to 4 | 1-4 | HP Smart Array P212/Zero Memory Controller |
| 120GB 3.0G SATA SSD | | | HP Smart Array P212/256 MB Controller |
| | | | HP Smart Array P410/256 MB Controller |
| | | | HP Smart Array P410/512 MB BBWC Controller |

External Storage

| | Quantity Supported | Position Supported | Controller |
|------------------------|--------------------|--------------------|--|
| 70 Modular Smart Array | Up to 4 | External | HP Smart Array P800/512 BBWC Controller |
| | Up to 4 | External | HP Smart Array P212/Zero Memory Controller |
| | Up to 2 | External | HP Smart Array P212/ 256 MB Controller |
| | | | HP Smart Array P411/256 MB Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |

Tape and Disk Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media, including the internal fitting models, see: <http://www.hp.com/go/tape>. For the complete range of D2D Backup Systems see: <http://www.hp.com/go/d2d>. For the complete range of RDX drives and media see: <http://www.hp.com/go/rdx>. For hardware and software compatibility of HP disk and tape backup products see: <http://www.hp.com/storage/SPOCK>.

Storage

| | Position Supported | Controller | Part Number |
|--|----------------------|---|-------------|
| HP SCSI Tape Drives LTO-1 Ultrium 232 LTO-2 Ultrium 448 LTO-3 Ultrium 920 LTO-3 Ultrium 960 LTO4 Ultrium 1760 LTO-4 Ultrium 1840 DAT 40 DAT 72 DAT 160 | Internal or External | HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter | 412911-B21 |
| | | NOTE: Please check the full compatibility information at: http://www.hp.com/storage/SPOCK | |
| HP SCSI Rack Mount Kits 1U Rack-Mount Kit 3U Rack-Mount Kit | External | HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter | 412911-B21 |
| HP USB Tape Drives DAT 40 DAT 72 DAT 160 DAT 320 | Internal or External | USB 2.0 Port | N/A |
| HP USB Rack Mount Kits 1U USB Rack-Mount Kit | External | USB 2.0 Port | N/A |
| HP SAS Tape Drives DAT 160 DAT 320 LTO-2 Ultrium 448 LTO-3 Ultrium 920 LTO-4 Ultrium 1760 LTO-4 Ultrium 1840 LTO-5 Ultrium 3000 LTO-5 Ultrium 3280 | Internal or External | HP Modular Smart Array SC44Ge 1-ports Int/1-ports Ext PCIe x8 SAS Host Bus Adapter | 416096-B21 |
| | | NOTE: Please check the full compatibility information at: http://www.hp.com/storage/SPOCK | |
| HP SAS Rack Mount Kits 1U Rack-Mount Kit 3U Rack-Mount Kit | External | HP Modular Smart Array SC44Ge 1-ports Int/1-ports Ext PCIe x8 SAS Host Bus Adapter | 416096-B21 |
| | | NOTE: Please check the full compatibility information at: http://www.hp.com/storage/SPOCK | |
| HP SCSI Tape Autoloaders DAT 72x10 Autoloader 1/8 G2 Autoloader | External | HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter | 412911-B21 |
| | | NOTE: Please check the full compatibility information at: http://www.hp.com/storage/SPOCK | |
| HP SCSI Tape Libraries MSL2024 MSL4048 MSL8096 MSL6000 | External | HP U320e SCSI Dual Channel Host Bus Adapter | AH627A |
| | | NOTE: Please check the full compatibility information at: http://www.hp.com/storage/SPOCK | |
| HP SAS Tape Autoloaders and Libraries 1/8 G2 Autoloader MSL2024 MSL4048 MSL8096 | External | HP Modular Smart Array SC44Ge 1-ports Int/1-ports Ext PCIe x8 SAS Host Bus Adapter | 416096-B21 |
| | | NOTE: Please check the full compatibility information at: http://www.hp.com/storage/SPOCK | |
| HP Fibre Channel Tape Libraries MSL2024 MSL4048 MSL8096 MSL6000 | External | Please consult the EBS connectivity matrix at: http://www.hp.com/go/ebs for connectivity information and the supported Fibre Channel HBAs shown in this QuickSpecs. | |
| HP USB RDX Removable Disk Backup System RDX160 RDX320 RDX500 RDX750 | Internal or External | USB 2.0 Port | N/A |
| HP D2D Backup Systems, iSCSI D2D2500i D2D4000i | External | Embedded Network Controller. If the server requires a hardware iSCSI initiator, the QLogic QLA4050 Host Bus Adapter is recommended. | |
| HP D2D Backup Systems, Fibre Channel D2D4000fc | External | Direct server attach is not supported, requires connection via SAN fabric. See: http://www.hp.com/storage/SPOCK | |

Technical Specifications

| | |
|---|---|
| System Unit | Dimensions (H x W x D) 17.0 x 7.9 x 24.0 in (43.2 x 20.0 x 61.0 cm) (with bezel) |
| Tower Weight (approximate) | Maximum (two hard drives, power supply, and processor installed) 50 lb (22.7 kg) |
| | Minimum (one hard drive, power supply, and processor installed) 33.1 lb (15.0 kg) |
| Input Requirements (per power supply) | Rated Line Voltage 90 VAC - 264 VAC |
| | Rated Input Current 6.5 A (at 100 VAC), 3 A (at 230 VAC) |
| | Rated Input Frequency 47 to 63 Hz |
| | Rated Input Power <527W @115/230 VRMS |
| BTU Rating | Maximum 1836 BTU/hr (at 100 VAC), 1706 BTU/hr (at 200 VAC) |
| Power Specifications | NOTE: To review typical system power ratings use the HP Power Advisor which is available online located at url: www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor - Click on the system of interest. Example: ML310 G5p - Follow the instructions of the next screens. |
| Power Supply Output (per power supply) | Rated Steady-State Power 400 W (at 100 VAC), 400 W (at 200 VAC) |
| | Maximum Peak Power 400 W (at 100 VAC), 400 W (at 200 VAC) |
| | |
| System Inlet Temperature | Operating 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F). |
| | Non-operating -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr). |
| Relative Humidity (non-condensing) | Operating 10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing. |
| | Non-operating 5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing. |
| Altitude | Operating 3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min). |
| | Non-operating 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min). |
| Acoustic Noise | Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). Idle |
| | L WAd (BELS) 5.0 B L pAm (dBA) 32 dBA |
| | Operating L WAd (BELS) 5.0 B L pAm (dBA) 32 dBA |
| Emissions Classification (EMC) | FCC Rating B |
| | Normative Standards CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1 |

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

| | | | | |
|--------------------------------------|-------------------------------|--|-----------------------------------|---------------------|
| HP SATA DVD-ROM Optical Drive | Applicable Disk | DVD-ROM | | |
| | | DVD-R /-RW (Read Only) DVD+R /+RW (Read Only) | | |
| | | 2.6 GB/side DVD-RAM (Read Only) | | |
| | | 5.2 GB/side DVD-RAM (Read Only) | | |
| | | CD-ROM Mode-1 data disc | | |
| | | CD-ROM Mode-2 data disc | | |
| | | CD Audio disc | | |
| | | CD-Extra | | |
| | | CD-RW (Read Only) | | |
| | | CD-R (Read Only) | | |
| | | CD Text | | |
| | | PhotoCD | | |
| | | CD-I (mode 2) | | |
| CD-I Ready | | | | |
| CD-Bridge | | | | |
| Capacity | Disk | DVD-ROM | DVD-SL | 4.7 GB/side |
| | | | DVD-DL | 8.5 GB/side |
| | | | Double Sided | 9.40 GB/side |
| | | | | 4.7 GB/side |
| | | | | 2.6 GB/5.2 GB/side |
| | | | | 4.7 GB |
| | | | Mode-1 | 650 (700 MB) |
| | | | Mode-2 | 742 MB (640 MB) |
| | | | | 2,048 bytes |
| | | | | 2,352 (Mode-0) |
| | | | | 2352, 2340, 2336, |
| | | | | 2048 bytes (Mode-1) |
| | | | | 2352, 2340, 2336, |
| | | 2048 bytes (Mode-2) | | |
| Block Size | Disk | DVD | | |
| | | CD | | |
| | | | | |
| Diameter | Loading Mechanism | 120 mm, 80 mm (with adapter at vertical mounting mode) | | |
| | | Tray type Auto Loading | | |
| | | | | |
| Interface | Access Times (typical) | SATA 1.5 | | |
| | | | | |
| | | Random | DVD-ROM < 140 ms, CD-ROM < 125 ms | |
| | | Full-Stroke | DVD-ROM < 250 ms, CD-ROM < 210 ms | |



Technical Specifications

| | | |
|---|---|---|
| Data Transfer Rate (sustained) | DVD-ROM CD-ROM | 21.6 MB/sec. Max. 6 MB/sec. Max. |
| Cache Buffer | 2 MB | |
| Spin-up Time (typical) | less than 10 seconds | |
| MTBF | 125,000 Power On Hours (POH) | |
| Ambient Temperature | Operating Storage/Transportation | 41° to 122° F (5° to 50° C) -40° to 120° F (-40° to 60° C) |
| Relative Humidity | Operating Storage/Transportation | 10% to 90% 5% to 95% |
| Drive Dimensions (HxWxD, maximum) | 1.62 x 5.75 x 7.87 in (41.3 x 146 x 200 mm) | |

| | | |
|---|--|--|
| HP SC40Ge SAS Host Bus Adapter with RAID | RAID Support | RAID 1 (Mirroring) RAID 0 (Striping) |
| | Logical Drives Supported | Up to 2 Logical Volumes Up to 10 drives total in all RAID volumes Up to 2 Drives per RAID 1 Up to 8 Drives per RAID 0 |
| | Maximum Capacity | 4TB (4 x 1TB) |
| | Data Transfer Method | 64-bit wide, PCIe 133 MHz (1 GB/s maximum bandwidth) |
| | Port Transfer Rate | 12 Gb/s per x4 Wide SAS Port (4 x 3 Gb/s) |
| | Simultaneous Drive Transfer Ports | 2 x4 Wide SAS Connectors |
| | Protocols | 3 Gbps SAS (Serial Attached SCSI) 1.5 Gbps SATA (Serial Advanced Technology Attachment) |
| | External SAS Connectors | None |
| | Internal SAS Connectors | 2 internal SFF8484 x4 SAS Connectors |
| | Upgradeable Firmware | 4MB flashable ROM |

| | | | |
|---|------------------------------|--|----------|
| Embedded NC326i Gigabit Server Adapter | Network Interface | 10Base-T/100Base-TX/1000Base-TX | |
| | Compatibility | IEEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX | |
| | Data Transfer Method | Four lane (x4), 100MHz PCI Express Reference Clock | |
| | Controller | BCM5715C | |
| | Network Transfer Rate | 10Base-T (Half-Duplex) | 10 Mb/s |
| | | 10Base-T (Full-Duplex) | 20 Mb/s |
| | | 100Base-TX (Half-Duplex) | 100 Mb/s |
| | | 100Base-TX (Full-Duplex) | 200 Mb/s |
| | | 1000Base-TX (Half and Full-Duplex) | 2000Mb/s |
| | Connector | RJ-45 | |
| Cable Support | 10Base-T | Categories 3, 4 or 5 UTP; up to 328 ft (100 m) | |
| | 10/100/1000Base-TX | Category 5 UTP; up to 328 ft (100 m) | |

| | | |
|--|--|---|
| HP Integrated Lights-Out 2 (iLO 2) integrated on system board | Architecture | 32-bit PCI-based health and remote management ASIC |
| | Processor | 32-bit RISC processor core running at 66MHz |
| | Upgradeability | Option firmware upgradeable via Flash ROM |
| | Operating System Support | Microsoft Windows Server 2008 Standard Edition (32bit and 64bit) |
| | | Microsoft Windows Server 2008 Enterprise Edition (32bit and 64bit) |
| | | Microsoft Windows Server 2003 and Windows Server 2003 R2, and Windows Server 2003 for Extended Systems Standard Edition, Enterprise Edition |
| | | Red Hat Enterprise Linux 5.4 (32bit and 64bit) |
| | | SUSE LINUX Enterprise Server 11 (32bit and 64bit) |
| | | SUSE LINUX Enterprise Server 10 (32bit and 64bit) |
| | | VMware ESX 4.0 |
| | | VMware ESX 3.5.0 |
| | | Microsoft Windows XP Professional Edition |
| | | Microsoft Windows Vista Business and Ultimate Editions |
| | | Red Hat Enterprise Linux Desktop 5.00 |
| | | SUSE Linux Enterprise Desktop 11 |
| SUSE Linux Enterprise Desktop 10 | | |
| Client Browser Support | Microsoft Internet Explorer 7 | |
| | Microsoft Internet Explorer 6 | |
| | Firefox 3.5 (on supported Windows and Linux systems) Firefox 3.0 (on supported Windows and Linux systems) | |
| Command Line Support | Telnet, Secure Shell and serial port access | |
| | Secure Socket Layer Secure Shell version 2 (Password and certificate) | |
| Security | Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser, CLP and XML scripting interface RC4 encryption of video | |
| Directory Support Services | Active Directory v1.0 (Windows 2003) | |
| Driver Support | Health Driver (HP ProLiant iLO 2 Management Controller Driver) iLO Management Channel Interface Driver | |
| Management protocols supported | SNMP 2, IPMI 2.0 (KCS interface), DMTF Server Management Command Line Protocol Specification (SM CLP), DMTF Web Services Management Specification (WS Management) | |

Environment-friendly Products and Approach **End-of-life Management and Recycling** Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Technical Specifications

© Copyright 2012 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.

Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.